



The World's Most Trusted Industrial Bolting Systems



LITHIUM SERIES® Electric Torque Tool (BTM-DOC Models)

Operations Manual

333 Route 17 N.
Mahwah, NJ 07430
USA

800-FOR-HYTORC
(800-367-4986)
201-512-9500

hytorc.com

TECHNICAL CERTIFICATIONS

Models

BTM-0250-DOC
BTM-0750-DOC
BTM-1000-DOC
BTM-2000-DOC
BTM-3000-DOC

Technical Certifications

Conforms to UL STDS 60745-1 & 60745-2-2
Certified to CSA STD C22.2 Nos. 60745-1 & 60745-2-2
For Hand-Held Motor-Operated Electric Tools.



EN ISO 12100-1:2011
EN ISO 12100-2:2011
EN ISO 14121-1:2007
EN ISO 11148-6:2012

Notice. The information contained in this document is subject to change without notice. HYTORC makes no warranty of any kind with regard to this material, including but not limited to, the implied warranties of merchantability and fitness for a particular purpose. HYTORC shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material. It is further recommended that the end-user or repair technician insure they have obtained and are familiar with the latest revision of the manual for the equipment outlined in this document.

Restricted Rights Legend. Use and duplication of the information contained within this manual is limited to the purchaser, end user, or licensed HYTORC representative. It is recommended that proper training for the equipment outlined in this manual be conducted by a HYTORC-authorized training representative for any person who is operating or repairing the equipment outlined in this document. Modification of, or disclosure by any other agency or representative is strictly forbidden.

Product Modifications. HYTORC DOES NOT ALLOW any of the products listed in this manual to be modified by any end user without exception. Should an application require a modification to the tool, or any of the standard accessories please consult with your local HYTORC representative and they will be able to obtain the assistance for any modification that may be required.

LITHIUM SERIES® is a registered trademark of HYTORC.

Copyright © 2018 HYTORC All Rights Reserved. Reproduction, adaptation, or translation without prior written permission is prohibited, except as allowed under the copyright laws.

Warranty. The LITHIUM SERIES Tool has a one-year limited warranty. Every tool is tested before leaving the factory and is warranted to be free from defects in workmanship and materials. HYTORC will repair or replace, without charge, any tool which, upon examination, proves to be defective in workmanship or materials for one (1) year after the date of purchase. This warranty does not cover damage resulting from repairs made or attempted by unauthorized repair facilities. The repair and replacement remedies described herein are exclusive. In no event shall HYTORC be liable for any incidental, special, or consequential damages, including loss of profits. This warranty is exclusive and in lieu of all other warranties or conditions, written or oral, expressed or implied for merchantability or fitness for particular use or purpose. This warranty gives you specific legal rights. You may also have other rights that vary from state to state and province to province. In those states that do not allow the exclusion of implied warranties or limitation of incidental or consequential damages, the above limitations or exclusions may not apply to you. If you have questions about the warranty, contact our customer service center at 201-828-5270.

Printed in the USA. April 2018



HYTORC

Series LITHIUM 36V
Model BTM-0700-0005
HYTORC
133 RE 17 N
Mahwah, NJ
WARNING: To reduce the risk of injury, read and follow all safety instructions.
MADE IN USA

LITHIUM SERIES 700

HYTORC

TABLE OF CONTENTS

1. IMPORTANT SAFETY INFORMATION	6
2. TOOL DESCRIPTION	10
3. SERVICE	11
FREE SERVICES	11
REPAIRS	11
TOOL RENTALS	11
HELP	11
FOLLOW US ONLINE	11
4. CARE AND HANDLING	12
INSPECT TOOLS & CALIBRATION	12
ENVIRONMENTAL CONSIDERATIONS	12
5. CHARGE, TEST & INSTALL BATTERY	13
CHARGE THE BATTERY	13
CHARGING INDICATOR	13
TEST THE BATTERY	14
INSTALL THE BATTERY	14
BATTERY RECYCLING	14
6. OPERATING THE CONTROL PANEL	15
PRIMARY CONTROL FEATURES	15
BASIC FUNCTION DESCRIPTIONS	16
TOGGLE TORQUE, ANGLE, AND RELEASE	16
SET TORQUE	17
SET ANGLE	17
SET RELEASE	17
7. NAVIGATING THE MENUS	18
MAIN MENU AND SUB-MENUS	18
OPERATION MENU	19
JOB DATA MENU	21
CONNECT USB CABLE	23
SAMPLE EXCEL FILE	23
SYSTEM MENU	24
ADMIN MENU	25
8. DUAL SPEED OPERATION	27
TWO-SPEED OPERATION	27
DUAL-SPEED JOG	27
9. BOLTING WITH CONVENTIONAL REACTION ARM	28
INSTALL REACTION ARM	28
INSTALL SOCKET	29
CONVENTIONAL TORQUE SETUP	29
CONVENTIONAL TORQUE TIGHTENING	30
CONVENTIONAL TORQUE LOOSENING	31
10. BOLTING WITH THE HYTORC WASHER	32
INSTALL HYTORC WASHER DRIVER	32
TIGHTENING WITH THE HYTORC WASHER DRIVER	33
LOOSENING WITH THE HYTORC WASHER	34
11. BOLTING WITH THE HYTORC NUT	35
INSTALL HYTORC NUT DRIVER	35
TIGHTENING THE HYTORC NUT	36
LOOSENING THE HYTORC NUT	37
12. ADDENDUM (IMPORTANT)	38

1. IMPORTANT SAFETY INFORMATION



Read and understand this material before operating or servicing the **LITHIUM SERIES®** Electronic Torque Tool. Failure to understand how to safely operate this tool could result in an accident causing serious injury or death.

- Inspect all Tool components as they are removed from the shipping container. If damage is found to any component, contact the shipper immediately. Do not use the tool.
- Failure to follow correct tool usage could result in personal injury, co-worker injury, and/or damaged tools and equipment.
- Ensure your working area is clean and unobstructed before beginning work.
- Tool maintenance and repair must be performed by a qualified technician.
- Modifying a tool or tool accessory is dangerous and invalidates the warranty.
- Inspect the tool before each use. Have any obviously worn or damaged parts replaced.
- When not in use, store the tool and tool accessories in the plastic storage case supplied with the tool. Do not expose the gun to high humidity or large temperature variations.



SAVE ALL WARNINGS AND INSTRUCTIONS FOR FUTURE REFERENCE



PERSONAL PROTECTIVE EQUIPMENT

Always wear the appropriate personal protective equipment when operating a tool including gloves, safety goggles, hearing protection, hard hat, and safety shoes.

TOOL SAFETY WARNINGS

Read all safety warnings and all instruction. Failure to follow the warnings and instructions may result in electric shock, fire, and/or serious injury.

WORK SAFETY AREA

- **Keep work area clean and well lit.** Cluttered or dark areas invite accidents. **Do not operate the tool in explosive atmospheres, such as in the presence of flammable liquids, gases or dusts.** The tool can create sparks which may ignite the dusts or fumes.
- **Keep children and bystanders away while operating the tool.** Distractions can cause you to lose control.

PERSONAL SAFETY

- **Stay alert, watch what you are doing and use common sense when operating the tool. Do not use the tool while you are tired or under the influence of drugs, alcohol, or medication.** A moment of inattention while operating the tool may result in serious personal injury.
- **Use personal protective equipment. Always wear eye protection.** Protective equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries.
- **Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and or battery pack, picking up or carrying the tool.** Carrying the tool with your finger on the switch or energizing power tools that have the switch on invites accidents.
- **Remove any adjusting key or wrench before turning the tool on.** A wrench or a key left attached to a rotating part of the tool may result in personal injury.
- **Do not overreach. Keep proper footing and balance at all times.** This enables better control of the tool in unexpected situations.
- **Dress properly. Do not wear loose clothing or jewelry.** Keep your hair, clothing and gloves away from the moving parts. Loose clothes, jewelry or long hair can be caught in moving parts.
- **If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used.** Use of dust collection can reduce dust-related hazards.

LITHIUM TOOL USE AND CARE

- **Do not force the tool. Use the correct tool for your application.** The correct tool will do the job better and safe at the rate for which it is designed.
- **Do not use the tool if the switch does not turn it on and off.** Any tool that cannot be controlled with the switch is dangerous and must be repaired.
- **Disconnect the plug from the power source and/ or the battery pack from the tool before making any adjustments, changing accessories, or storing tool.** Such preventive safety measures reduce the risk of starting the tool accidentally.
- **Store idle tools out of the reach of children and do not allow persons unfamiliar with the tool or these instructions to operate the tool.** Tools are dangerous in the hands of untrained users.
- **Maintain tools. Check the misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power of tool's operation. If damaged, have the tool repaired before use.** Many accidents are caused by poorly maintained tool.
- **Use the tool, accessories in accordance with these instructions, taking into account the working conditions and the work to be performed.**
- **Using the tool for the operations different from those intended could result in a hazardous situation**
- **Rechargeable only with the charger specified by manufacturer.** A charger that is suitable for one type of battery pack may create as risk of fire when used with another battery pack.
- **Use the tool only with specifically designated battery packs.** Use of any other battery pack may risk injury and fire.
- **When the battery pack is not in use, keep it away from other metal objects, like paper clips, coins, keys, nails, screws and other small metal objects that can make a connection from one terminal to another.** Shorting the battery terminals together may cause burns or a fire.
- **Under abusive conditions, liquid may be ejected from the battery; avoid contact. If contact accidentally occurs, flush it with water. If liquid contacts eyes, additionally seek medical help.** Liquid ejected from the battery may cause irritation or burns.

SERVICE

- **Have your tool serviced by a qualified repair person using identical replacement parts.** This will ensure that the safety of the tool is maintained.

IMPORTANT BATTERY PACK INSTRUCTIONS

- **Do not splash or immerse in water or other liquids.**
- **Do not incinerate the battery pack even if it is severely damaged or is completely worn out.** The battery pack can explode in a fire. Toxic fumes and materials are created when lithium ion battery packs are burned.
- **Do not charge or use the battery in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.** Inserting or removing the battery from the charger may ignite dust or fumes.
- **If battery contents come into contact with the skin, immediately wash area with mild soap and water.**
- **If battery liquid gets into the eyes, rinse over the open eye for 15 minutes or until irritation ceases.** If medical attention is needed, the battery electrolyte is composed of a mixture of liquid organic carbonates and lithium salts.
- **Contents of opened battery cells may cause respiratory irritation.** Provide fresh air. If symptoms persist, seek medical attention.
- **Charge the battery packs only in battery chargers supplied for charging this product.**
- **Do not pack with conductive items.**



WARNING!

Burn hazard. Battery liquid may be flammable if exposed to spark or flame.



WARNING!

Fire hazard. Do not store or carry battery so that metal objects can contact exposed battery terminals. For example, do not place battery in aprons, pockets, tool boxes, product kit boxes, drawers with loose nails, screws, keys etc. Transporting batteries can possibly cause fires if the battery terminals inadvertently come in contact with conductive materials such as keys, coins, hand tools and the like.



WARNING!

Never attempt to open the battery pack for any reason. If battery pack case is cracked or damaged, do not insert into charger or tool. Do not crush, drop, or damage battery pack. Do not use a battery pack or charger that has received a sharp blow, has been dropped or has been run over or damaged in any way (i.e. pierced with a nail, hit with a hammer, stepped on). Damaged battery packs should be returned to an authorized HYTORC service center for recycling.



US Department of Transportation Hazardous Materials Regulations

The US Department of Transportation Hazardous Materials Regulations (HMR) actually prohibit transporting batteries in commerce or on airplanes, (i.e. packed in suitcases and carry-on luggage). When transporting individual batteries, make sure that the battery terminals are protected and well insulated from materials that could contact them and cause a short circuit. For any other concerns in regarding the transportation of LI-ION batteries, consult your Transportation Carrier.

IMPORTANT BATTERY CHARGER SAFETY INSTRUCTIONS

- Before using charger, read all instructions and cautionary markings on charger, battery pack and product using battery pack.
- Do not attempt to charge the battery pack with any chargers other than the one in this manual. The charger and battery pack are specifically designed to work together.
- These chargers are not intended for any uses other than batteries supplied with LITHIUM SERIES Tools as described in this manual. Any other uses may result in risk of fire, electric shock or electrocution.
- Do not expose charger to rain or snow.
- To disconnect charger, firmly grasp plug and remove. Do not disconnect the charger by pull-ing on the cord.
- Make sure the cord is located so that it will not be stepped on, tripped over, or otherwise subjected to damage or stress.
- Do not use an extension cord unless it is absolutely necessary.
- An extension cord must have adequate wire size (AWG) for safety. In general the larger the wire size the greater the capacity of the cable.
- Do not block any ventilation slots on charger power supply.
- DO NOT attempt to charge the battery pack with any chargers other than the one in this manual. The charger and battery pack are specifically designed to work together.
- These chargers are not intended for any uses other than batteries supplied with LITHIUM SERIES Tools as described in this manual. Any other uses may result in risk of fire, electric shock or electrocution.
- Do not expose charger to rain or snow.
- To disconnect charger, firmly grasp plug and remove. Do not disconnect the charger by pull-ing on the cord.
- Make sure the cord is located so that it will not be stepped on, tripped over, or otherwise subjected to damage or stress.
- Do not use an extension cord unless it is absolutely necessary.
- An extension cord must have adequate wire size (AWG) for safety. In general the larger the wire size the greater the capacity of the cable.
- Do not block any ventilation slots on charger power supply.



WARNING!

Burn hazard. Battery liquid may be flammable if exposed to spark or flame.



WARNING!


Burn hazard. To reduce the risk of injury, charge only tool batteries. Other types of batteries may burst causing personal injury and damage.



CAUTION!

Under certain conditions, with the charger plugged into the power supply, the charger can be shorted by foreign material. Foreign materials of a conductive nature such as, but not limited to, steel wool, aluminum foil, or any buildup of metallic particles should be kept away from charger cavities. Always unplug the charger from the power supply when there is no battery pack in the cavity. Unplug charger before attempting to clean.

2. TOOL DESCRIPTION

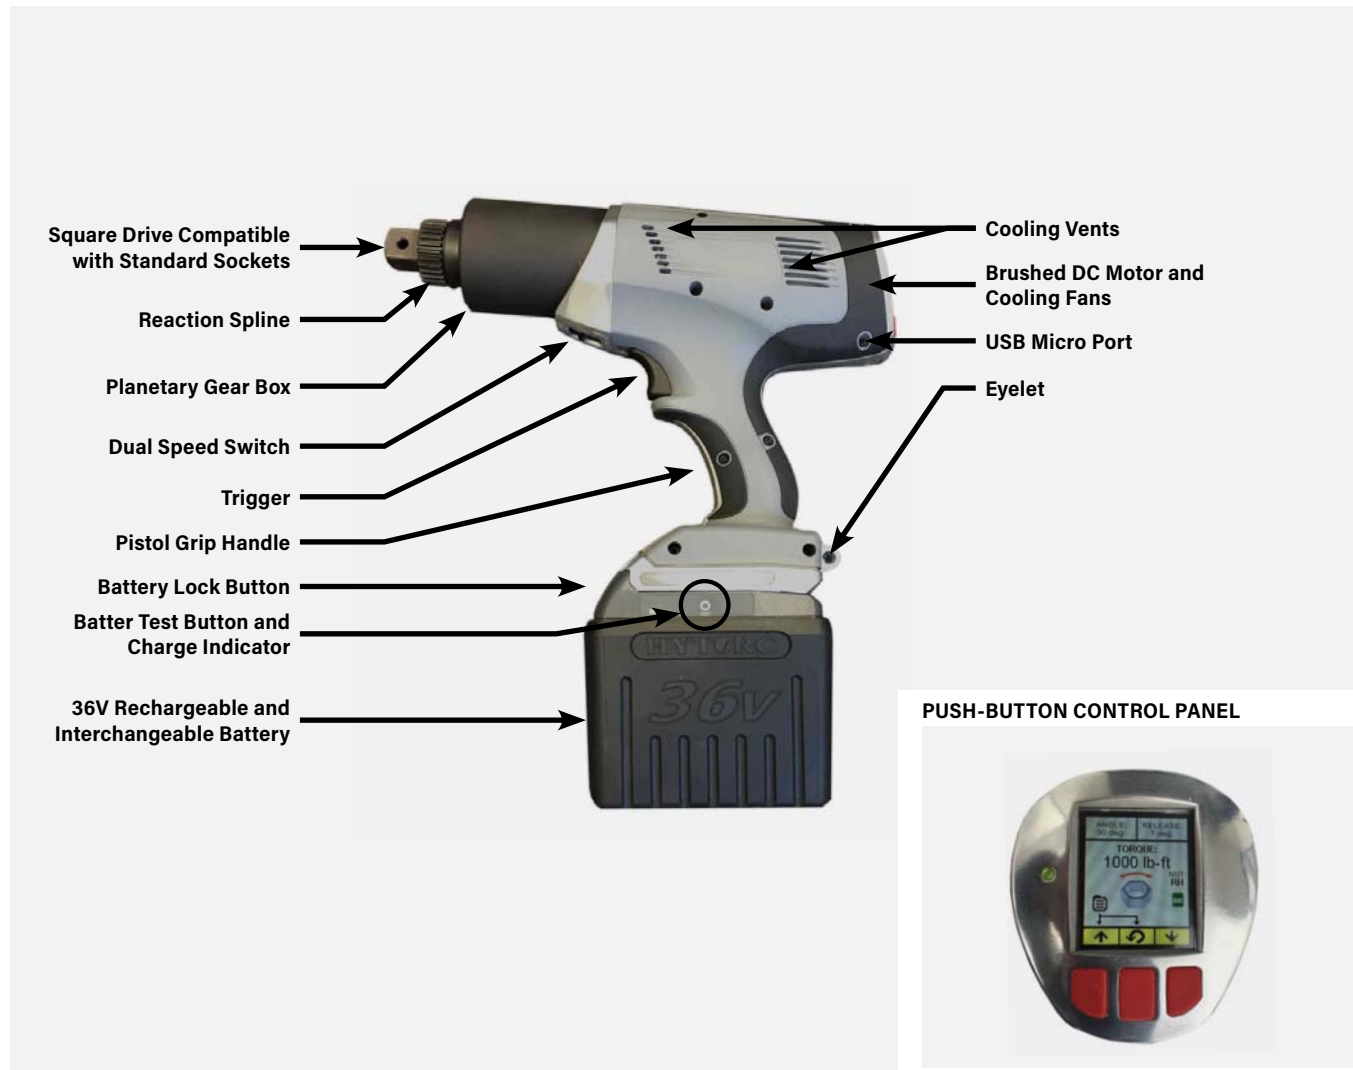

The LITHIUM SERIES® Electric Torque Tool provides the following.

- High-strength planetary gear drive powered by brushed DC electric motor
- Two Speeds: Fast run-down, high powered torque.
- Electronic control and setup via push-button menu.
- Heads-Up LCD display.
- Ergonomic lightweight hand-held design with pistol-grip and trigger activation.
- Portable tool powered by rechargeable extended-life 36V lithium ion battery.
- Standard square-drive with dual-reaction spline.
- Integrated data acquisition and export capability.

3. SERVICE



FREE SERVICES*

- User safety training upon receipt of merchandise
- Semi-Annual user safety training on request
- Annual safety seminar on appointment
- Loaner tools in event of product failure within 24 hours
- Torque/Tension consultation/seminar
- Half-Day, first-use supervision
- User training for first-time rentals
- Warranty repairs including return-freight
- Annual product inspection on request
- Product demonstrations
- 12-Month no-questions-asked warranty
- Upgrades during the lifetime of the tool to enhance safety, durability, and function

***Above services are not subject to travel expense charges.**

REPAIRS

- All repairs are guaranteed for 6 months.
- All repairs are subject to labor and part cost as outlined in the official HYTORC price list.
- All repairs will be tested and calibrated to ensure the highest quality repairs.
- All warranty repairs are free of all charges including return-freight.

TOOL RENTALS

- 100% of all paid rentals will be applied as a discount towards any new purchase in that calendar year
- User training for first-time rentals is free of all cost
- Rental tools are guaranteed to perform and are subject to the free loaner tool policy of HYTORC

HELP

If you require any further assistance, please call your local HYTORC Representative or 1-800-FOR-HYTORC (1-800-367-4986). Please visit us at HYTORC.com.

FOLLOW US ONLINE



4. CARE AND HANDLING



INSPECT TOOLS & CALIBRATION

- Inspect all components; if damaged report any sign of damage to the shipper and do not use the tool.
- Inspect the tool before each use; repair or replace any obviously worn or damaged parts.
- Maintenance must be performed by a qualified technician.
- Modifying any of the components invalidates the warranty.
- Check the calibration date on the tool. HYTORC recommends tool recalibration annually.
- If more than a year has passed since last calibration, contact HYTORC for recalibration.
- When not in use store all tool components in the plastic storage case.
- Save all instructions and calibration reports in the storage case.

ENVIRONMENTAL CONSIDERATIONS



The LITHIUM SERIES Tool is a rugged industrial tool with an electric motor and electronic control. The following environmental considerations will help maintain reliable tool operation. Pictured above, keep cooling vents clear (1), and secure the tool per local practice (2) to protect from dropping.

- The tool will withstand light splashing but do not submerge or subject to continuous rain or extreme humidity.
- The operating temperature of the tool should be less than 150°F.
- All Cooling Vents should be kept clear of dust, dirt and debris to allow internal fans to maintain airflow to keep the motor and electronics within temperature limits, do not subject the tool to extreme dust environments that would clog the vents or do not cover the vents with your hand.
- The tool and electronic components are not certified or approved for explosive environments or areas containing combustible chemical materials.

5. CHARGE, TEST & INSTALL BATTERY



- 1. Charging Cable
- 2. Battery Pack
- 3. Charging Cradle
- 4. Power Supply
- 5. Power Supply Cord



- 6. Power Indicator
- 7. Legend
- 8. Charging Indicator
- 9. Fault Indicator

CHARGE THE BATTERY

- The LITHIUM SERIES Tool is supplied with two long life 36 volt batteries and a charger.
- Before charging a battery verify the local voltage supply to ensure capability with the charger; this will typically be 110 Volts or 220 Volts AC.
- Connect the charging cradle to the power supply.
- Connect the power cord to a grounded outlet.
- If necessary connect the plug adapters for the local power outlet.
- Insert the battery by sliding it into the charger and locking into place. The power indicator will be illuminated green when plugged in.
- The charging indicator flashes green while charging and turns solid green when the battery is fully charged.
- The 36 volt battery is fully charged in approximately 90 minutes.

CHARGING INDICATOR

- POWER INDICATOR green when charger is plugged into AC outlet.
- CHARGING INDICATOR is flashing green while battery is charging.
- CHARGING INDICATOR solid green when battery is fully charged.
- FAULT INDICATOR is flashing red for battery fault not charging.
- Battery is charged in approximately 90 minutes.

TEST THE BATTERY



- The Lithium-Ion battery has a long run life and will power the tool at full speed until the battery is depleted, so there is no gradual drop in power during use.
- For continuous use, have one or more spare battery packs charging while the tool is in use. When need simply swap batteries from the charger to the tool.
- Batteries can be charged hundreds of times without any noticeable loss in capacity
- Batteries can be returned at no charge for recycling at HYTORC locations or local recycling centers.

1. Push the TEST button on the side of the battery and the LED's will provide an approximate indicator of remaining battery life:

- 1 LED On ≤ 25% Battery Charge Left**
- 2 LEDs On ≤ 50% Battery Charge Left**
- 3 LEDs On ≤ 75% Battery Charge Left**
- 4 LEDs On ≤ 100% Battery Charge Left**

INSTALL THE BATTERY



The battery easily slides onto the tool body and snaps into place.

1. Press the release button on the battery and slide battery pack off the charger.
2. Align the base of the tool with the rails in the battery and slide the battery pack firmly into the handle until you hear (or see) the lock snap in place.
3. To remove the battery pack from the tool, press the release button on the battery and firmly pull the battery pack out of the tool.

BATTERY RECYCLING

The RBRC (Rechargeable Battery Recycling Corporation) Seal on the lithium ion battery (or battery pack) indicates that the costs to recycle the battery (or battery pack) at the end of its useful life have already been paid by HYTORC. The RBRC, in cooperation with HYTORC and other battery users, has established programs in the United States to facilitate the collection of spent lithium ion batteries. Help protect our environment and conserve natural resources by returning the spent lithium ion battery to an authorized HYTORC service center for recycling. You may also contact your local recycling center for information on where to drop off the spent battery. RBRC is a registered trademark of the Rechargeable Battery Recycling Corporation.

6. OPERATING THE CONTROL PANEL



PRIMARY CONTROL FEATURES

- Press Any Button to Power-On Tool (the tool automatically turns off after 5 min)
- A new tool shows the factory default settings
- A tool that has been used before displays the last settings used on the tool before it was powered off.
- Left Button Increases the Torque Value
- Right Button Decreases the Torque Value
- Screen Features; Torque, Angle, Release, Direction, Battery Status, Fastener Type, Data Record Indicator
- Push and hold center button to cycle; TORQUE, ANGLE and RELEASE
- Hold 2 Left Buttons to display main and sub-menu options

BASIC FUNCTION DESCRIPTIONS

TORQUE: Allows the operator to enter the target torque that the gun will seek when the trigger is pulled and held.

ANGLE: If an angle setting is above "0" the gun will add this angle of rotation to a completed torque operation using the maximum output of the unit.

RELEASE ANGLE: After completing an operation, the gun will automatically run backwards the specified angle to release windup from reaction torque. This will allow the operator to remove the tool without loosening the fastener.

TORQUE AND ANGLE OPERATION CAUTION: If the torque required to rotate the fastener through the selected angle is unknown the torque may exceed the capacity of the tool in which case a failure warning will be displayed: "Motor Stalled at Full Power."

In order to determine if the tool is capable of meeting the requirement the following is suggested:

1. Tighten the fastener to the desired torque in Torque Mode.
2. Mark the position of the fastener.
3. With the tool still in Torque Mode set the tool to max output and measure how far the fastener rotates.
4. If the fastener does not meet the angle requirement (with some margin) the torque to achieve the angle is beyond the tools capacity and a larger tool should be used.

NOTE: This procedure will subject the fastener to max tool output torque. If unsure the fastener can safely handle max torque do not perform this operation.

TOGGLE TORQUE, ANGLE, AND RELEASE

The tool provides simple access to set Torque, Angle and Release by toggling the center button. The torque setup screen is the home screen for operating the tool.



1. TORQUE: Press and hold the center button for approximately 3-seconds and release it to access the Angle screen.



2. ANGLE: Press and hold the center button for approximately 3-seconds and release it to access the Release screen.



3. RELEASE: Press and hold the center button for approximately 3-seconds and release it to access the Torque screen.

SET TORQUE

- Set the Torque Value is set by simply pushing the left button ← to increase the torque or by pushing the right button ↓ to decrease the torque.
- Torque may be set to any value from the minimum to the maximum capability of the tool (or MAX MIN Torque Limits set in the ADMIN menu).
- Output units may be displayed in lb-ft, N-m, kgf-m or %. (See output unit settings under the ADMIN menu)
- The Torque rotational direction arrow and the rotating nut icon reflect the fastener clockwise or counter clockwise rotation associate with the specific fastener type. (The fastener type may be set under the Operation – Fastener Type menu: Right-Hand, Left-Hand, HYTORC NUT and HYTORC Washer).

SET ANGLE

- Certain bolt tightening specifications may require an Angle Value in-addition to or instead of a Torque Value.
- The tool provides the ability to set an Angle value anywhere from 0 degrees to 360 degrees.
- The Angle Value is increased simply by pushing the left button ← to increase the angle or by pushing the right button ↓ to decrease the angle.
- If an Angle Value is set the gun will add the desired angle of rotation by applying additional torque after the completed torque operation up to the maximum output of the tool.
- The angle feature is actuated by continuing to hold the trigger after the tool successfully completes the TORQUE.
- The angle force is applied after a time delay set in the Angle Delay menu – typical ½ second to 3 seconds.

SET RELEASE

- When the tool achieves the TORQUE value (and ANGLE if set) the motor automatically stalls and the gear box continues to exert force (and reaction force) essentially locking the tool onto the nut.
- The gun provides a feature to release the tool from the nut by setting a RELEASE Angle to reverse the motor slightly thus taking the applied force off the gear box and reaction point and releasing the tool from the nut without loosening the nut.
- The RELEASE Angle Setting may vary depending on the application and may need to be developed iteratively by testing the value on the application; the objective is to set the minimum RELEASE angle required to release the tool without applying a force in the opposite direction that would turn or loosen the nut.
- While the tool has a capability to set the RELEASE between 0 and 359 degrees, the RELEASE is typically set on the lower end and less than 10 degrees (1-to-3 degrees for HYTORC Washer, or 3-to-7 degrees for reaction arms) so that nut is not loosened. Under certain conditions the operator may need higher RELEASE Angle settings and these should be verified to make sure that the nut is not being loosened by the higher setting.
- The automatic release feature is actuated by continuing to hold the trigger after the tool successfully completes TORQUE (and ANGLE if set).
- During the operation the screen will change to show the release angle and direction, the tool motor will reverse by the desired release angle and then stall again to allow the tool to be removed from the nut.
- The RELEASE Angle is applied following application of TORQUE (and ANGLE if set) and after an additional time delay set in the Angle Delay menu – typical ½ second to 3 seconds.


7. NAVIGATING THE MENUS



MAIN MENU AND SUB-MENUS


The Main Menu provides Operations, Job Data, System, Admin and the Exit and Power Off options.


Press and hold the left and center buttons simultaneously for approximately three seconds, release buttons when the Main Menu is displayed.

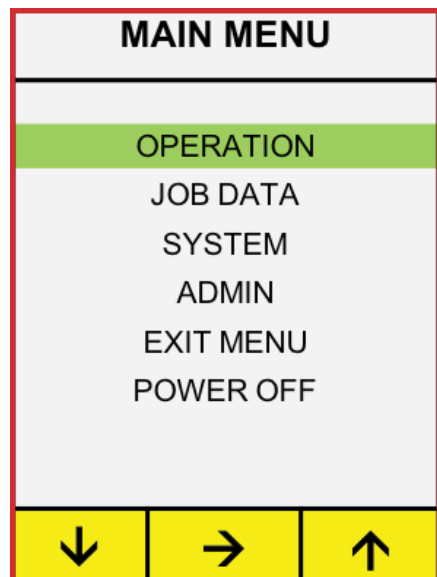

MAIN MENU

- The green bar highlights the current position
- Press left button ← to scroll down, right button → to scroll up
- Press the center button ↓ to select and display a sub-menu

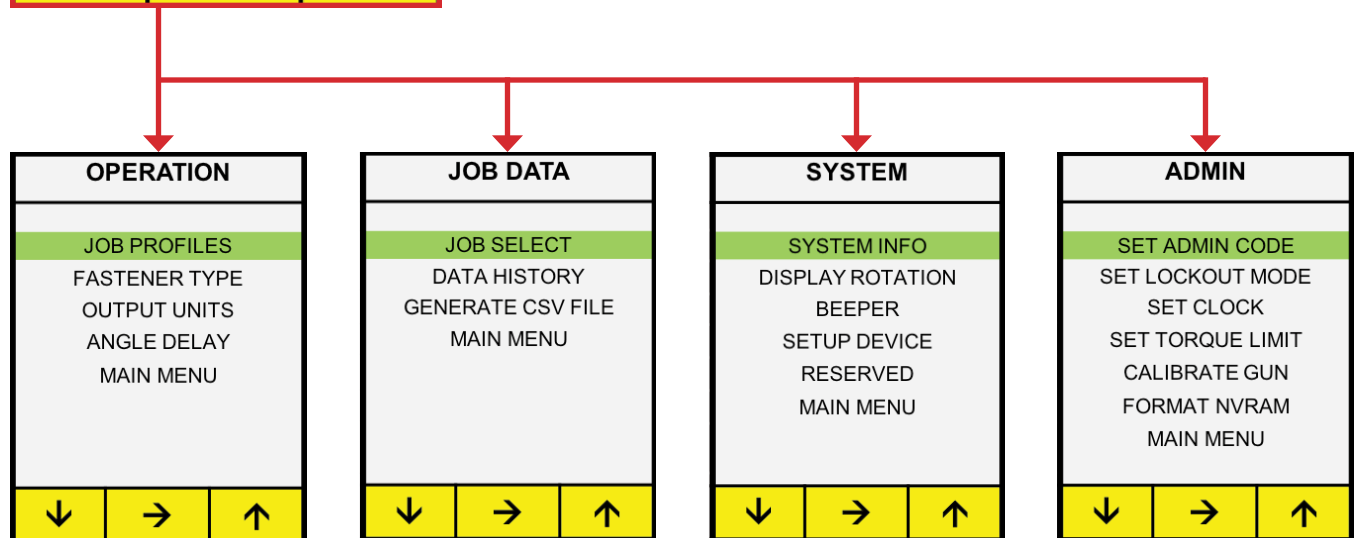



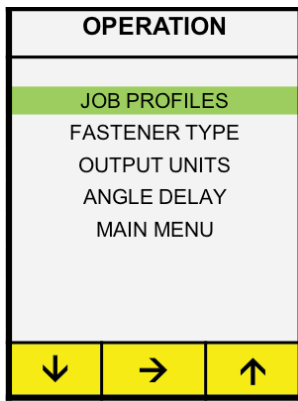


OPERATION MENU

The Operation menu contains most functions for everyday operation.

- The green bar highlights the current position
- Press left button ← to scroll down, right button → to scroll up
- Press the center button ↓ to select and display a sub-menu

(Continued on following page)

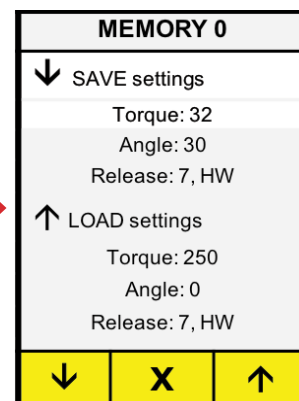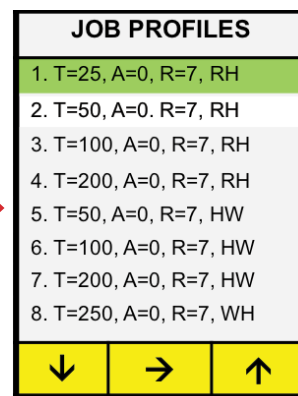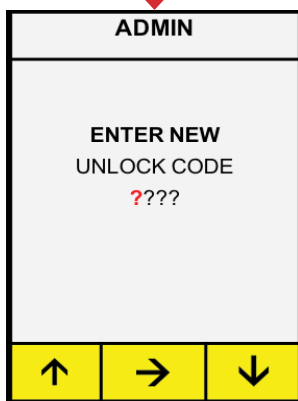

In order to save or load a job profile the user must first enter the 4-digit code to unlock the tool. To enter the code press button ↑ to increase the digit or ↓ to decrease the digit, press → to advance to the next digit until the correct code is entered (default 0000). When the 4-digit code is entered correctly press → again to JOB PROFILES.

NOTE: Wrong code returns user to previous screen. There is no limit on number of attempts. See administrator for correct code.


Allows the user to save tool parameters to memory as a Saved Job Profile (SJP), or to load previously saved parameters (SJPs) from memory.

The tool can save up to 8 job profiles; each profile includes saved values for TORQUE (T), ANGLE (A), RELEASE (R) and fastener type. Scroll and select the desired setup values – then select →, or if saving new setup values select → to access submenu to either SAVE or LOAD settings.

The user can SAVE the settings currently on the home display – now shown in SAVE settings - by pushing the left button ↓ also adds the profile to the top of JOB PROFILES.

Alternatively, the user can LOAD the selected profile – now shown in LOAD settings - by pushing the right button ↑. Exit without load or save by hitting the center button X. Return to the OPERATION Menu upon completion.

(OPERATION MENU continued from previous page)

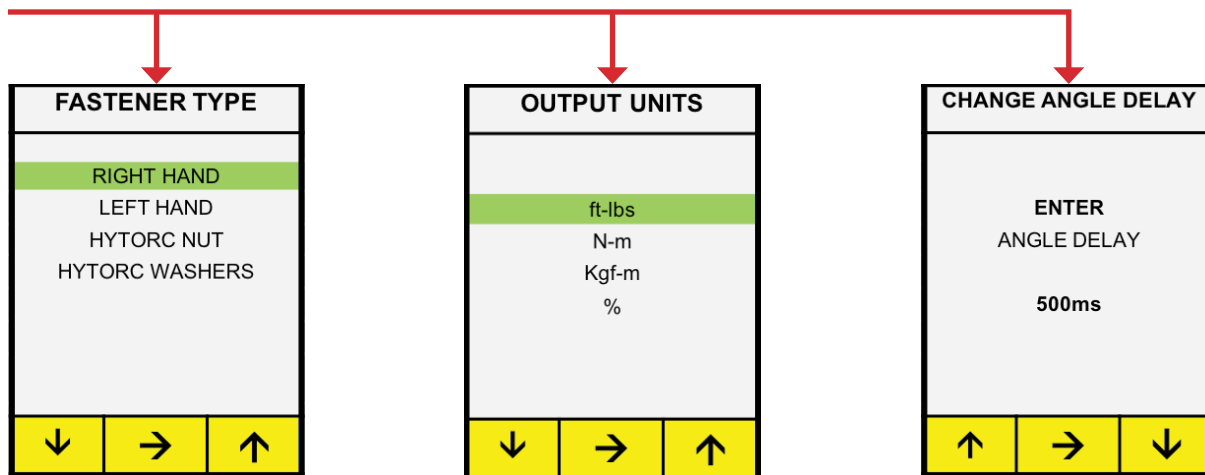

Press appropriate button ↓↑ to scroll up or down, push → to select fastener type:

RH RIGHT HAND bolts tightened clockwise.

LH LEFT HAND bolts tightened counterclockwise.

HN HYTORC NUT tightened counterclockwise.

HW HYTORC WASHER tightened clockwise.

Any selection → returns users to OPERATION menu.

NOTE: When using the HYTORC Washer or HYTORC Nut the safety feature requiring a push of the button before operation is disabled. Tool should never be used with a reaction arm in this setting.

Allows the operator to select the preferred units of the torque display.

Press buttons to scroll ↓ or ↑ to highlight the desired units, press → to select desired units and return to the OPERATION menu.

The user can adjust the time delay for applying the ANGLE and RELEASE following the TORQUE operation – the delay can range from 0ms to 3000ms.

The time delay is applied after the TORQUE value by continuing to hold the trigger.

Push up button ↑ to increase the delay or down button ↓ to decrease the delay. Select → to return to the OPERATION menu.

JOB DATA		
JOB SELECT		
DATA HISTORY		
GENERATE CSV FILE		
MAIN MENU		
↓	→	↑

JOB DATA MENU

The Job Data menu contains settings needed to record and download data from the tool.

- The green bar highlights the current position
- Press left button ← to scroll down, right button → to scroll up
- Press the center button ↓ to select and display a sub-menu

(Continued on following page)

ADMIN		
ENTER NEW UNLOCK CODE ????		
NOTE: Wrong code returns user to previous screen. No limit on number of attempts. See administrator for correct code.		
↑	→	↓

JOB SELECT		
JOB NUMBER		
END JOBS		
↑	→	↓

ENTER JOB NUMBER ???		
↑	→	↓

In order to record data the user must first enter the 4-digit UNLOCK CODE to unlock the tool.

To enter the code press button ↑ to increase the digit or ↓ to decrease the digit, press → to advance to the next digit until the correct code is entered (default 0000).

When the correct 4-digit code is entered press → again to proceed to SET RECORDING MODE.

NOTE: Wrong code returns user to previous screen. There is no limit on number of attempts. See administrator for correct code.

User selects JOB NUMBER to turn on Data Recording for a particular job. After selecting JOB NUMBER the user is prompted for a 4-digit job number to begin recording data.


Alternatively, the user may select END JOBS to stop recording.

The user is asked to enter a 4-digit JOB NUMBER (0001 to 9999) for identifying the data record.

To enter the job number press ↑ to increase the digit or ↓ to decrease the digit, press → to advance to the next digit until the code is entered.

Press → to begin DATA RECORDING and return to the JOB DATA menu. The tool is now recording and the JOB ON and JOB NUMBER are now displayed on the home screen to indicate the tool is now recording all job data.

(JOB DATA MENU continued from previous page)

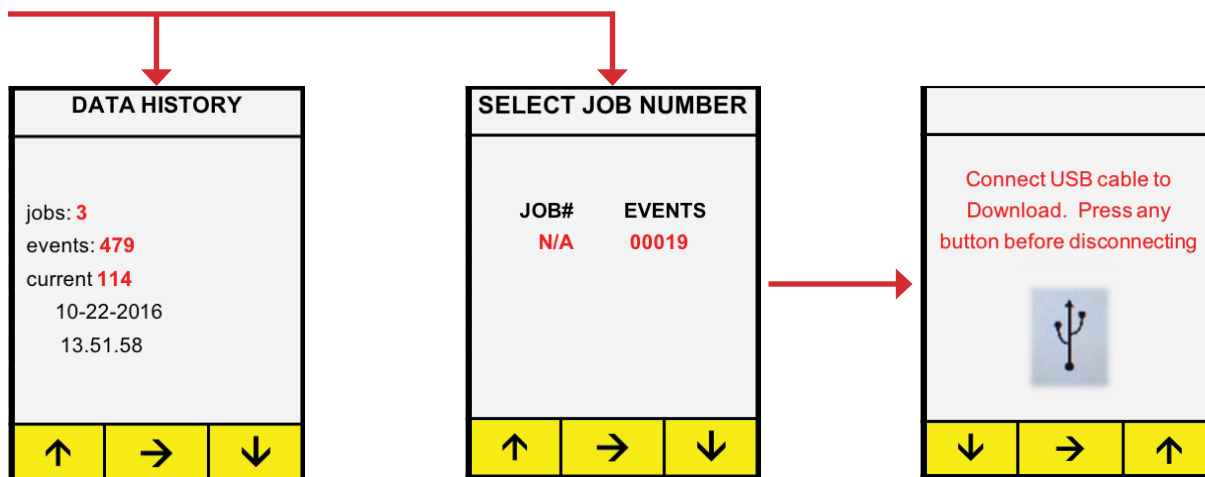

Provides a summary of jobs and events currently being saved in memory.

Press the buttons ↑↓ to scroll through the job numbers to select the data set you want to download. Press → to select the job number and to generate the CSV file.

This screen prompts the user to connect a standard USB cable between the PC (Type A) to the tool (Micro A).

The tool is discovered by the PC just as any mass storage device. The PC will display a folder allowing the user to click to open the JOB DAT file in Excel format.


The file serves as an electronic record of the JOB DATA. When done, press → button to exit the GENERATE CSV FILE mode and return to the JOB DATA menu.

CONNECT USB CABLE



SAMPLE EXCEL FILE

DATE	TIME	EVENT	TORQUE	TORQUE CHECK	ANGLE	RELEASE	JOB	DURATION	TEMP	VOLTAGE	TL	FASTENER	TORQUE UNITS	COMPCODE
18-02-31	21:27:40	2	310	—	15	90	7	12	0	G	LOOSEN	HN	FT.-LBS.	PREMATURE TRIGGER RELEASE
18-02-31	21:27:48	2	310	—	15	90	7	6	0	G	TIGHTEN	HN	FT.-LBS.	PREMATURE TRIGGER RELEASE
18-02-31	22:07:35	2	310	—	15	90	7	8	0	G	LOOSEN	HN	FT.-LBS.	PREMATURE TRIGGER RELEASE
18-02-31	22:10:38	2	310	—	15	90	7	5	0	G	LOOSEN	HN	FT.-LBS.	PREMATURE TRIGGER RELEASE

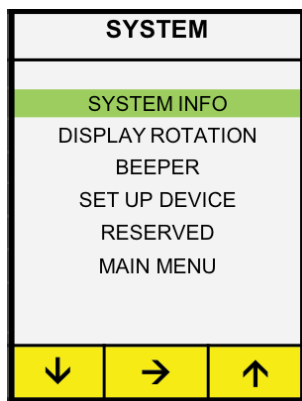


SYSTEM MENU

The SYSTEM menu contains additional settings for tool configuration.

- The green bar highlights the current position
- Press left button ← to scroll down, right button → to scroll up
- Press the center button ↓ to select and display a sub-menu

NOTE: The SET UP DEVICE and DIAGNOSTIC Menu items are not intended for field use. These functions are password protected and only accessible by HYTORC in the factory.

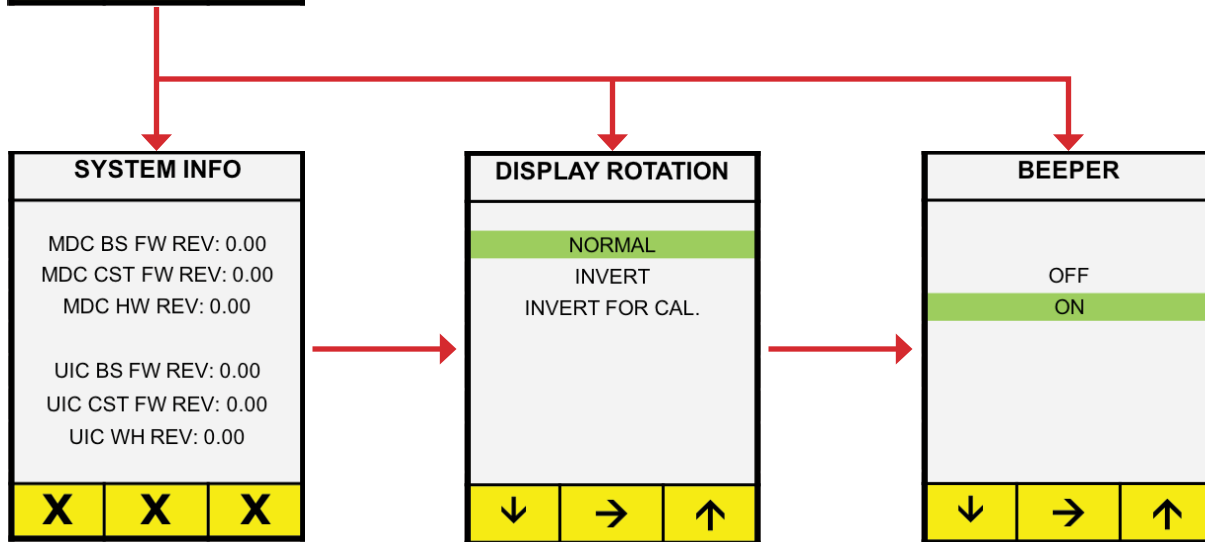

Displays Firmware (FW) and Hardware (HW) versions for MDC (Motor Drive Control) And UIC (User Interface Control).

Press any button to return to SYSTEM menu.

Provides capability to orient the display in normal or inverted mode:

NORMAL Screen is legible when battery is down.

INVERT Screen is legible when battery is up.

INVERT FOR CAL Inverted for calibration

Scroll down ↓ or scroll up ↑ to reach desired orientation for the display and push → to select the orientation and return to the SYSTEM SETTINGS menu.

The user can optionally enable or disable the beeper.

Press buttons to scroll ↓ or ↑ to highlight the desired state for the beeper, press → to select beep OFF or ON and return to the ADMIN menu.

If turned on, the beeper will sound one time for each successful operation and 4 times to indicate an error.

ADMIN		
SET ADMIN CODE		
SET LOCKOUT MODE		
SET CLOCK		
SET TORQUE LIMIT		
CALIBRATE GUN		
FORMAT NVRAM*		
MAIN MENU		
↓	→	↑


ADMIN MENU

The ADMIN menu contains less seldom used features or those typically only configured by an administrator or supervisor.

- The green bar highlights the current position
- Press left button ← to scroll down, right button → to scroll up
- Press the center button ↓ to select and display a sub-menu

NOTE: The CALIBRATE GUN and FORMAT NVRAM options are not intended for field use, these are only accessed by HYTORC authorized service personnel.

(Continued on following page)

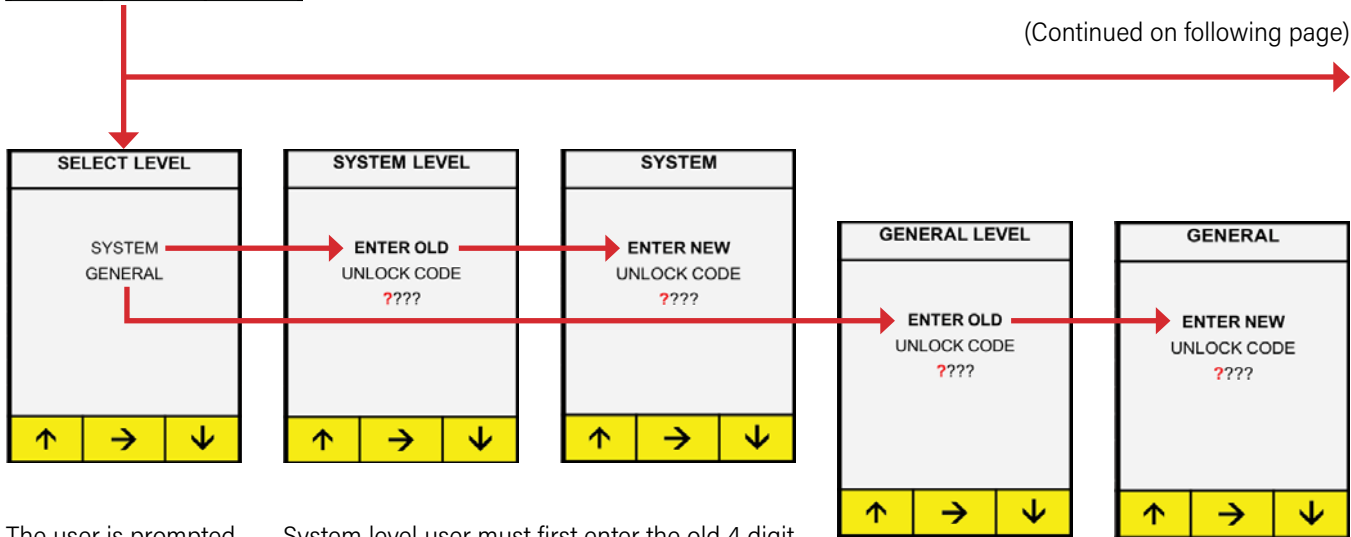

The user is prompted to select either SYSTEM or GENERAL access level.

The SYSTEM level is only used by certified personnel for calibrating the tool.


The GENERAL level password is assigned by an administrator to provide security for setting torque limits, setting the clock and putting the tool in lockout mode.

System level user must first enter the old 4 digit unlock code (default 0000) for access and then enter a new unlock code for system access.

NOTE: When System password is entered the General password is cleared to 0000.

General administrator must first enter the old 4-digit unlock code (default 0000) for access and then enter a new unlock code for system access.

(ADMIN MENU continued from previous page)

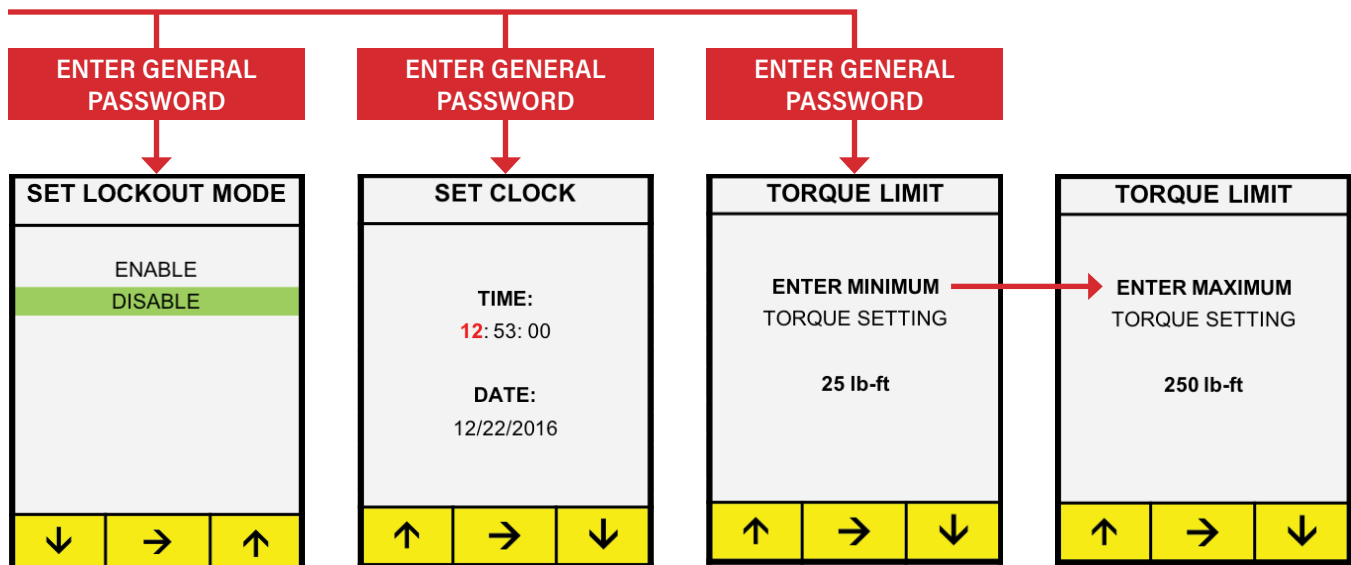

The user may enable a lockout mode that prevents any user from changing any parameter except directional control. This allows the administrator to lock the tool at desired settings for various users. Press the buttons ↑↓ to scroll to ENABLE or DISABLE lockout mode, press → to select LOCKOUT MODE and return to the ADMIN menu

Allows user to set time and date by entering appropriate numerical values.

Press up button ↑ increases the value and down button ↓ to decrease the value, select → to advance to the next numerical value, after setting year push → to return to SYSTEMS SETTINGS menu.

To adjust the minimum TORQUE limit press button ↑ to increase the value or ↓ to decrease the value.

Press → to save the lower torque limit – screen flashes “Saving setting” and then displays the upper torque limit screen.

To adjust the maximum TORQUE limit press button ↑ to increase the value or ↓ to decrease the value.

Press → to save the upper torque limit – screen flashes “Saving setting” and then exits to ADMIN menu.

8. DUAL SPEED OPERATION

TWO-SPEED OPERATION

Each LITHIUM SERIES Tool is equipped with a dual-speed gearbox. The gearbox has two modes:



1. RUNDOWN MODE: The gearbox is set to run at a higher speed and very low torque to run nuts down to seated position prior to tightening on an application. This mode applies a very small amount of torque just to overcome the resistance of running nuts down onto bolts for a short duration.




2. TORQUE MODE: Used for to apply high torque to fully tighten bolts with required loads.


The tool is switched between TORQUE and RUNDOWN by setting the dual speed switch beneath the barrel of the tool. Switch to TORQUE for torque operations, and RUNDOWN to run down nuts. Always be sure the switch is fully engaged in either position, never in the middle.

DUAL SPEED JOG

In the event the gear selector does not engage, a JOG FORWARD or JOG REVERSE screen will be displayed. Press the trigger briefly to synchronize the gears and re-engage the drive mechanism.

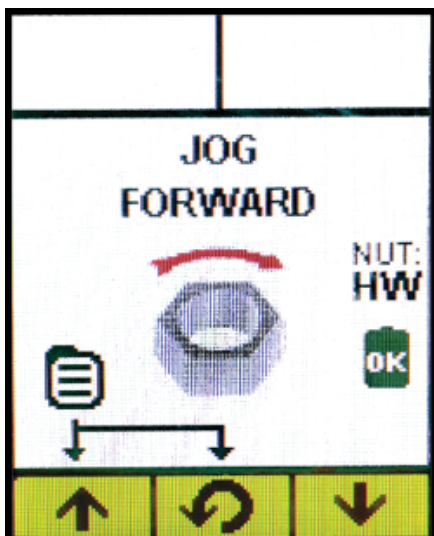

JOG FORWARD

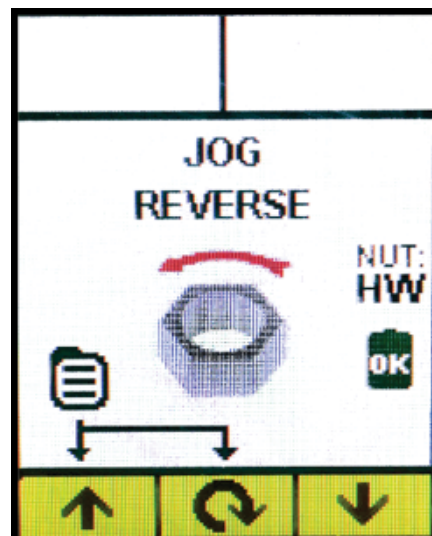

JOG REVERSE

9. BOLTING WITH CONVENTIONAL REACTION ARM




WARNING!

Failure to make sure the reaction arm is in direct contact with an immovable object before fastening could result in serious injury. Make sure that no part of your body is in the path of the reaction arm when the nut is tightened to avoid injury.

INSTALL REACTION ARM



1. FLAT ON REACTION SPLINE. 2. ALLEN SET SCREW

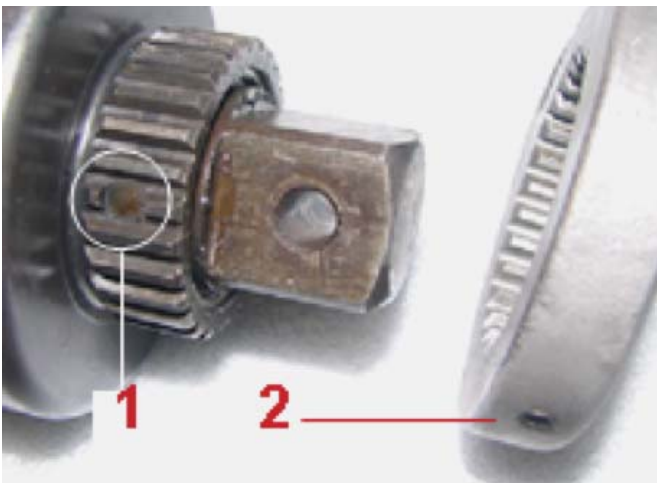

TIGHTEN ALLEN SET SCREW



The **LITHIUM SERIES** Tool is easily configured for conventional torque applications with standard sockets and reaction arms.

- The reaction arm is quickly secured to the tool
- Slide the reaction arm over the drive while aligning the set screw with the flat on the Spline
- Tighten the set screw to firmly attach the reaction arm.
- Challenge the reaction arm to make sure it is firmly secured.
- Never modify a reaction arm as this may lead to personal injury or damage to the tool.

INSTALL SOCKET



- Set the Torque Value is set by simply pushing the left button ← to increase the torque or by pushing the right button ↓ to decrease the torque.
- Torque may be set to any value from the minimum to the maximum capability of the tool (or MAX MIN Torque Limits set in the ADMIN menu).
- Output units may be displayed in lb-ft, N-m, kgf-m or %. (See output unit settings under the ADMIN menu)
- The Torque rotational direction arrow and the rotating nut icon reflect the fastener clockwise or counter clockwise rotation associate with the specific fastener type. (The fastener type may be set under the Operation – Fastener Type menu: Right-Hand, Left-Hand, HYTORC NUT and HYTORC Washer).

CONVENTIONAL TORQUE SETUP



- Power on the tool, adjust the settings and select fastener. For conventional torque applications the fastener will be right or left hand.
- If necessary set the speed switch to RUN DOWN to quickly run down the nuts until they are flush against the flange.
- Prior to applying torque, position a back wrench to prevent the back nut from turning during tightening.
- Place the socket on the nut, making sure to fully engage the nut.
- Make sure the reaction arm is firmly abutted against a stationary object before applying torque.

CONVENTIONAL TORQUE TIGHTENING



- To begin the TORQUE operation, pull and hold the trigger.
- With Right or Left Fasteners, a message is displayed instructing the user press an additional button on the control panel to ensure the operator keeps both hands clear of the reaction arm.
- As soon as the user pushes the drive will turn.
- Once the tool starts the reaction arm will move to firmly press against the reaction surface and then the tool will begin applying torque and tighten the nut.
- Continue holding the trigger until the tool reaches the desired torque and stops.
- If an ANGLE has been specified, continue holding the trigger, the tool will pause and restart after the angle delay.
- If a RELEASE has been specified, continue holding the trigger, the tool will pause and restart after the angle delay.
- Release the trigger after the tool has completed all specified operations.
- The status light turn amber during operation. If the operation is successful, the status light will turn green, if unsuccessful the status light will turn red.
- If the BEEPER is enabled the tool will provide an audible beep upon completion of the operations.
- Remove the tool socket from the nut.
- Should torque be applied without a release angle the tool may lock onto the nut. If this happens set the tool to loosen to free the tool and repeat the tighten operation.

CONVENTIONAL TORQUE LOOSENING



- The Tool provides the maximum torque capacity in reverse providing a powerful breakout capability.
- Press the center button to toggle to the loosen mode.
- When using conventional torque install a back wrench to keep the back nut from turning.
- Position the tool over the nut.
- Position the reaction arm against a firm surface.
- Pull and hold the trigger and any button on the rear panel to apply torque to loosen the nut.
- Once the tool starts the reaction arm will move and firmly press against the reaction surface. The tool will then begin applying torque to loosen the nut.
- The status light turn amber during operation. If the operation is successful, the status light will turn green, if unsuccessful the status light will turn red.
- Remove the tool driver from the nut.

10. BOLTING WITH THE HYTORC WASHER

INSTALL THE HYTORC WASHER DRIVER



- The **LITHIUM SERIES** Tool is easily configured for tightening bolts where the HYTORC Washer is used.
- Identify the appropriate size HYTORC Washer Driver.
- Slide the washer driver over the square drive and spline while aligning the thumb screw with the flat on the spline.
- Tighten the thumb screw to secure the Driver.
- Challenge the driver to make sure it is securely attached.

TIGHTENING WITH THE HYTORC WASHER DRIVER



- Power on the tool, adjust tool settings and set the fastener type to HYTORC WASHER.
- If necessary set the speed switch to RUN DOWN to quickly run down the nuts until they are flush against the flange. Set the speed switch back to Torque after the run down is complete.
- Position the tool over the nut and HYTORC Reaction Washer.



- Pull the trigger to apply torque until the tool reaches the desired torque and stops.
- If an ANGLE has been specified, continue holding the trigger, the tool will pause and restart after the angle delay.
- If a RELEASE has been specified, continue holding the trigger, the tool will pause and restart after the angle delay.
- Release the trigger after the tool has completed all specified operations.
- During the operation the status light turn amber during operation. If the operation is successful the status light will turn green, if unsuccessful the status light will turn red
- If the BEEPER is enabled the tool will provide an audible beep upon completion of the operations.
- Remove the tool socket from the nut.
- Should torque be applied without a release angle the tool may lock onto the nut. If this happens set the tool to loosen to free the tool and repeat the tighten operation.

LOOSENING WITH THE HYTORC WASHER DRIVER



- The Tool provides the maximum torque capacity in reverse providing a powerful breakout capability.
- Press the center button to toggle to the loosen mode.
- Position the driver over the nut and HYTORC reaction washer and hold the trigger and begin applying torque.
- During the operation the status light turn amber during operation. If the operation is successful the status light will turn green, if unsuccessful the status light will turn red
- Remove the tool driver from the nut.

11. BOLTING WITH THE HYTORC NUT

INSTALL THE HYTORC NUT DRIVER



- The **LITHIUM SERIES** Tool is easily configured for tightening HYTORC Nuts.
- Identify the appropriate size HYTORC Nut Driver
- Slide the nut driver over the square drive and spline while aligning the set screw with the flat on the spline.
- Tighten the set screw to secure Nut Driver.
- Challenge the nut driver to make sure it is securely attached.

TIGHTENING THE HYTORC NUT



NOTE: The HYTORC Nut inner sleeve is tightened in the counter clockwise direction (left hand threads).

- Power on the tool, adjust tool settings and set the fastener type to HYTORC Nut.
- Position the tool over the nut.
- Pull the trigger to apply torque until the tool stalls at the specified torque
- If a RELEASE ANGLE has been specified continue holding the trigger and the tool will restart and then stall again after completing the RELEASE angle. Then the tool can be released from the nut.
- Release the trigger after the tool has completed all specified operations.
- The status light turn amber during operation. If the operation is successful, the status light will turn green, if unsuccessful the status light will turn red.
- If the BEEPER is enabled the tool will provide an audible beep upon completion of the operations.
- Remove the tool socket from the nut.
- Should torque be applied without a release angle the tool may lock onto the nut. If this happens set the tool to loosen to free the tool and repeat the tighten operation.

LOOSENING THE HYTORC NUT



- The Tool provides the maximum torque capacity in reverse providing a powerful breakout capability.
- Press the center button to toggle to the loosen mode.
- It may necessary to install a back wrench to keep the back nut from turning.
- When loosening HYTORC Nuts position the driver and hold the trigger until the HYTORC Nut is loose.
- The status light turn amber during operation. If the operation is successful, the status light will turn green, if unsuccessful the status light will turn red.
- Remove the tool driver from the nut.

12. ADDENDUM (IMPORTANT)

THIS ADDENDUM SUPERSEDES INFORMATION CONTAINED IN THE PRODUCT MANUAL

WHAT HAS CHANGED?


This product contains the new and faster HYTORC U85105 120W 36V/18V Battery Charger.

HOW HAS IT CHANGED?

This new battery charger contains a single combined Charge Status/Fault LED Indicator, circled below in red.



THE CHARGING/FAULT LED INDICATOR OPERATES AS FOLLOWS:

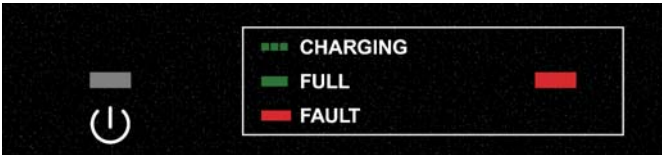

OPERATIONAL STATUS	LED INDICATOR
Power Off	Off
Power On / Standby	Off
Charging	Flashing Green
Full Charged	Solid Green
Fault or Charge Pending	Solid Red



HYTORC WORLD HEADQUARTERS

333 Route 17 N., Mahwah, NJ 07430, +1-201-512-9500

WORLDWIDE HYTORC LOCATIONS

ADVANCED BOLTING SOLUTIONS P. LTD

Navi Mumbai, India, +91-22-4171-4444

HYTORC BRAZIL

Rio de Janeiro, BR, +55-21-2621-1911

HYTORC OF CHINA

Shanghai, +86-21-6254-0813

HYTORC MIDDLE EAST

UAE, +44-7436-549468

HYTORC CENTRAL EUROPE & RUSSIA

Perchtoldsdorf, AU, +43-1-86-51-368

HYTORC JAPAN

Suginami-ku, TYO, +81-3-3314-3315

HYTORC UK

Cramlington, NB, +44-1-670-363800

HYTORC OF KOREA

Kyunggi-Do, +82-31-708-0850

HYTORC AUSTRALIA

Adelaide, South Australia, +61-8-8293-8411

HYTORC SOUTH AFRICA

Mount Edgecombe, DUR, +27-(0)315023119

HYTORC SINGAPORE

Singapore, +65-689-789-95

HYTORC LATIN AMERICA

Coatzaacoalcos, VER, +52-921-21-52760

Locate your nearest HYTORC representative or location:

hytorc.com/world • info@hytorc.com • +1-201-512-9500